





Innovative Design, Maximum Efficiency

As a leading manufacturer of premium heating radiators, we deliver energy-efficient, high-quality products that blend advanced technology with elegant design.



gorgeous style

**We manufacture radiators
we deliver comfort**

ENTERPRISE BRIEF INTRODUCTION

Sunlike Radiators specializes in manufacturing high-quality tubular radiators, designer radiators, panel radiators, and heated towel rails. Our state-of-the-art factory, covering over 3,500 square meters, is equipped with advanced production lines, including Zehnder machines like piece-welding and automatic polishing systems, ensuring the highest standards of precision and efficiency.

Situated close to Tianjin Port, we are ideally located in an area with a strong industrial presence and well-established supply chains. This proximity helps us optimize production costs, keeping our pricing competitive while maintaining exceptional quality.




We've invested in cutting-edge equipment, including the Krauss-Maffei production line from Germany, Swiss Golden Horse spraying equipment, and Panasonic KR welding machines from Japan. These technologies allow us to ensure every product is crafted to perfection, from design and cutting to welding, spraying, and packaging.

Sunlike Radiators holds ISO 9001:2015, ISO 14001, and GOST certifications, reflecting our dedication to maintaining the highest standards of quality, environmental management, and compliance with industry-specific requirements. Additionally, our products are CE EN442 certified, meeting the rigorous standards required for the European market.

We are proud to serve customers worldwide, exporting to markets such as the UK, Kazakhstan, Russia, Uzbekistan, Turkmenistan, Poland, Ukraine, Mongolia, and more.



Enterprise Certificates

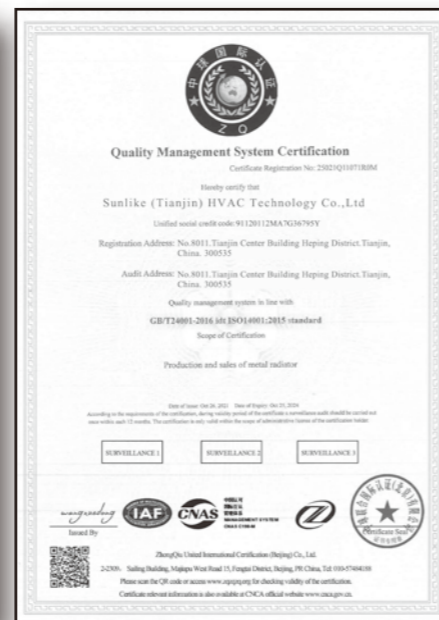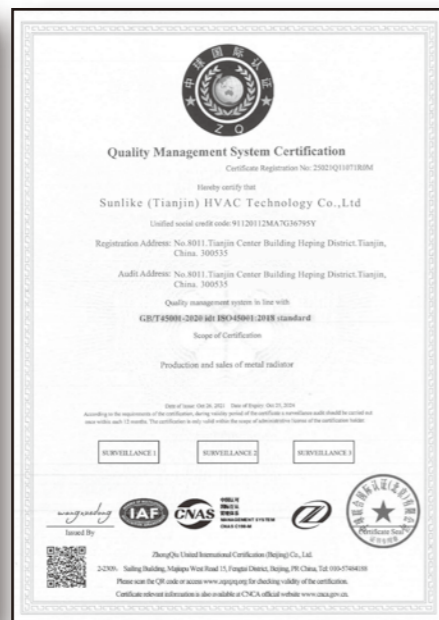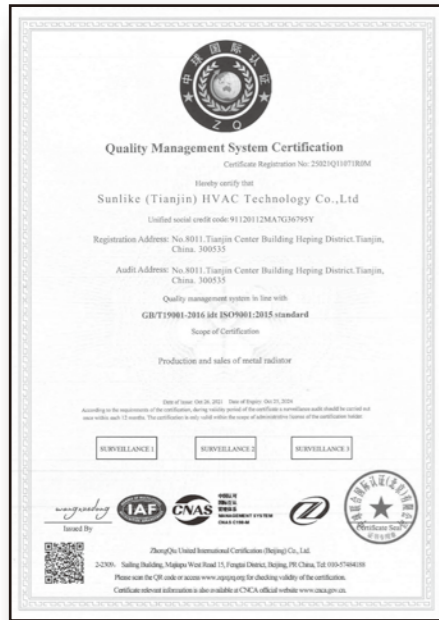



SWISS GOLDEN HORSE SPRAY LINE

The surface coating adopts the Swiss "Golden Horse" coating equipment assembly line also selected by the "Airbus" company. Production can reach the level of piano lacquer surface.

ZEHNDER WELDING MACHINES

360-degree seamless welding technology, realize one-side welding and double-side molding, and no collapse and leakage phenomenon in thousands of pressure tests.



GERMAN KRAUSS-MAFFEI PROFESSIONAL PRODUCTION LINES

The German KraussMaffei fully automatic production line has been put into use, which reduces errors caused by labor and improves product quality and production efficiency.



TECHNICAL ADVANTAGES

PRODUCTION STRENGTH

SUNLIKE has 3 radiator production lines, each with a minimum area of 10,000 square meters and a largest workshop of nearly 30,000 square meters. Implementation of ISO9001 quality management system, passed the European CE certification.



SL-AD11

This designer radiator features an elegant elliptical tube design, offering both exceptional heat performance and modern aesthetic appeal. Its sleek and compact form blends effortlessly into contemporary interiors, providing warmth with style.



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
600	413	560	7	1462	8	anthracite white black
600	590	560	10	2080	11	
600	767	560	13	2698	14	
600	1003	560	17	3522	19	
600	1180	560	20	4140	22	
600	1416	560	24	4964	26	
600	1593	560	27	5582	28	

Elliptical Tube :50*25mm Round Tube: 35mm

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1600	236	1560	4	2280	11	anthracite white black
1600	354	1560	6	3410	17	
1600	472	1560	8	4540	22	
1600	590	1560	10	5670	26	
1800	236	1760	4	2516	12	
1800	354	1760	6	3764	18	
1800	472	1760	8	5012	27	
1800	590	1760	10	6260	32	

Elliptical Tube :50*25mm Round Tube : 35mm

SL-AD12

This designer radiator features an elegant elliptical tube design, offering both exceptional heat performance and modern aesthetic appeal. Its sleek and compact form blends effortlessly into contemporary interiors, providing warmth with style.



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
600	413	560	7*2	2736	13	anthracite white black
600	590	560	10*2	3900	19	
600	767	560	13*2	5064	25	
600	1003	560	17*2	6616	32	
600	1180	560	20*2	7780	38	
600	1416	560	24*2	9332	46	
600	1593	560	27*2	10496	51	

Elliptical Tube :50*25mm Round Tube : 35mm

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1600	236	1560	4*2	3588	20	anthracite white black
1600	354	1560	6*2	5372	30	
1600	472	1560	8*2	7155	38	
1600	590	1560	10*2	8940	48	
1800	236	1760	4*2	4612	22	
1800	354	1760	6*2	6908	33	
1800	472	1760	8*2	9205	41	
1800	590	1760	10*2	11500	51	

Elliptical Tube :50*25mm Round Tube: 35mm

SL-WD11

This flat-panel radiator offers a sleek and minimalist design, perfect for spaces where style meets efficiency. Its compact structure delivers optimal heat output while seamlessly blending into contemporary interiors.



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
600	408	560	6	1328	8	anthracite white black
600	612	560	9	1982	11	
600	748	560	11	2418	14	
600	884	560	13	2854	16	
600	1020	560	15	3290	18	
600	1156	560	17	3726	20	
600	1428	560	21	4598	25	

Flat Tube :60*15mm Round Tube : 35mm



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1600	272	1560	4	2044	11	anthracite white black
1600	408	1560	6	3056	18	
1600	544	1560	8	4068	23	
1600	680	1560	10	5080	29	
1800	272	1760	4	2196	13	
1800	408	1760	6	3284	19	
1800	544	1760	8	4372	25	
1800	680	1760	10	5460	31	

Flat Tube :60*15mm Round Tube : 35mm

SL-WD12


With its double-row flat-panel design, this radiator offers superior heat output while maintaining a sleek, low-profile appearance. Its efficient performance and stylish form make it perfect for modern spaces that demand both warmth and design.

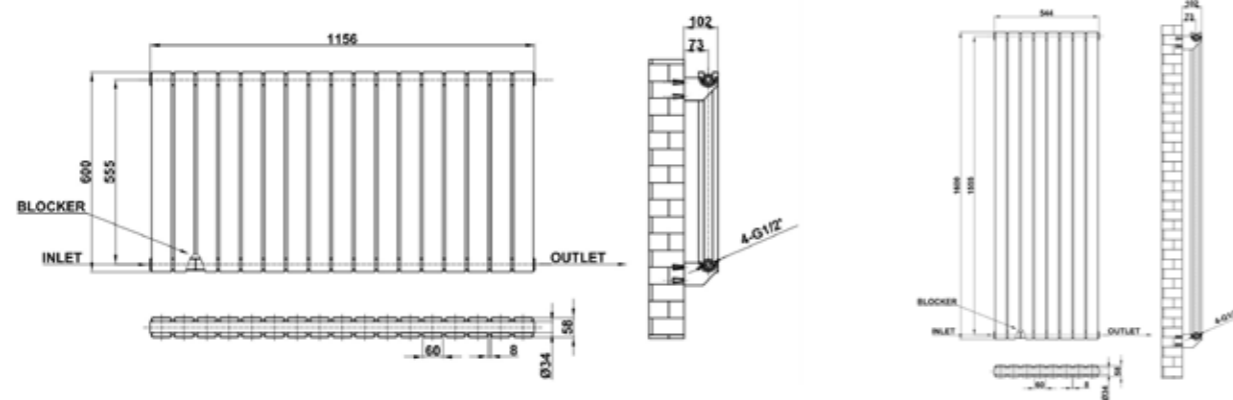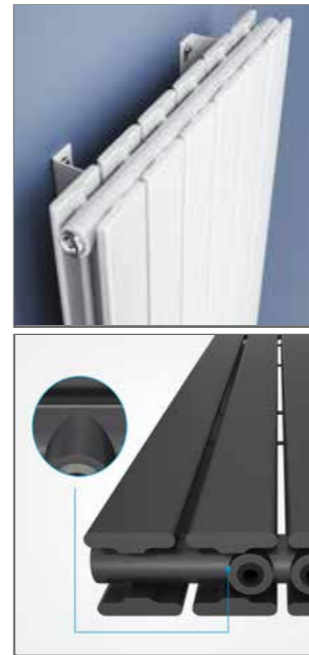

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
600	408	560	6*2	2036	14	anthracite white black
600	612	560	9*2	3044	20	
600	748	560	11*2	3716	24	
600	884	560	13*2	4388	28	
600	1020	560	15*2	5060	32	
600	1156	560	17*2	5732	36	
600	1428	560	21*2	7076	44	

Flat Tube:60*15mm Round Tube : 35mm

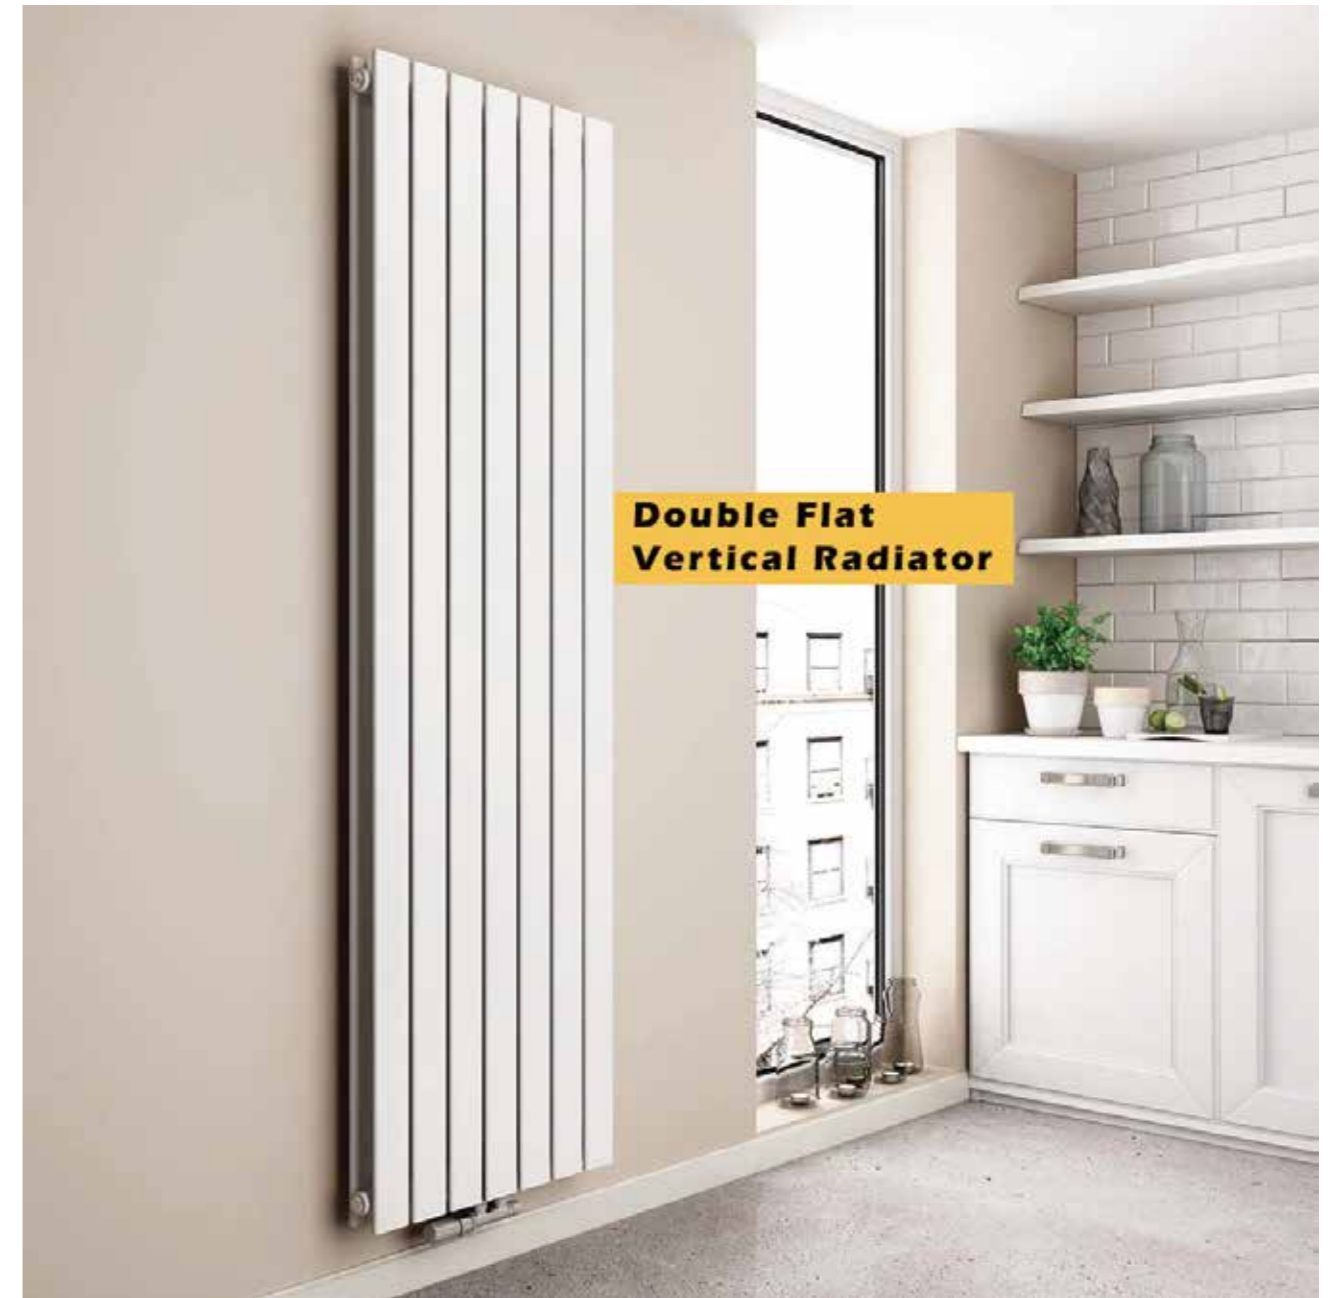


TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1600	272	1560	4*2	3668	21	anthracite white black
1600	408	1560	6*2	5492	33	
1600	544	1560	8*2	7316	43	
1600	680	1560	10*2	9140	48	
1800	272	1760	4*2	3972	24	
1800	408	1760	6*2	5945	36	
1800	544	1760	8*2	7925	41	
1800	680	1760	10*2	9900	53	

Flat Tube :60*15mm Round Tube : 35mm

SL-WB11

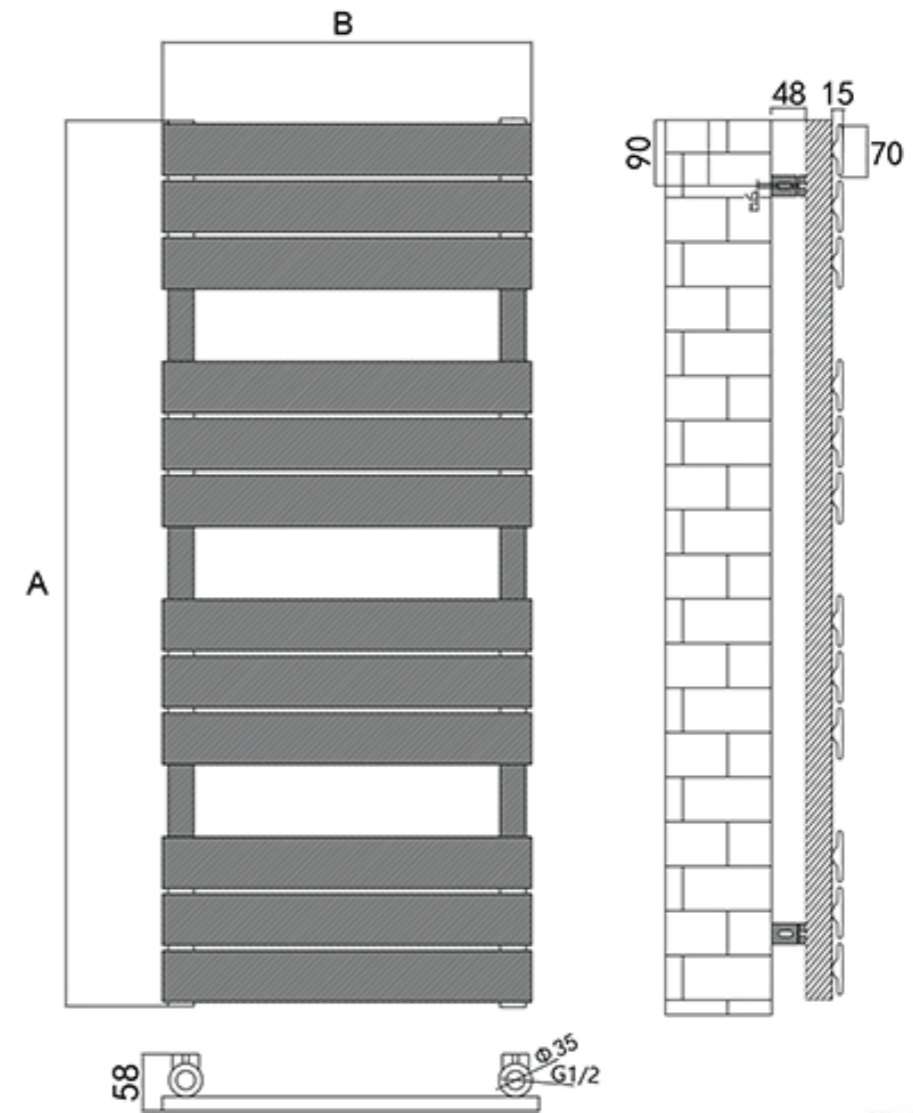


TECHNICAL SPECIFICATION

Size (H*W mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
650x400mm	350	7	1243	8.92	anthracite white black
650x500mm	450	7	1409	10.44	
800x450mm	400	8	1620	11.06	
800x500mm	450	8	1928	13.36	
1000x450mm	400	10	2233	12.68	
1000x600mm	550	10	2631	14.5	
1200x450mm	400	12	2830	14.5	
1200x500mm	450	12	2945	16.2	
1200x600mm	550	12	3339	17	
1600x450mm	400	16	3591	19	
1600x600mm	550	16	4755	23	

SL-WE11

Experience luxury and practicality in one with our flat panel heated towel rail. Provides efficient heating while adding a sophisticated touch to your bathroom.

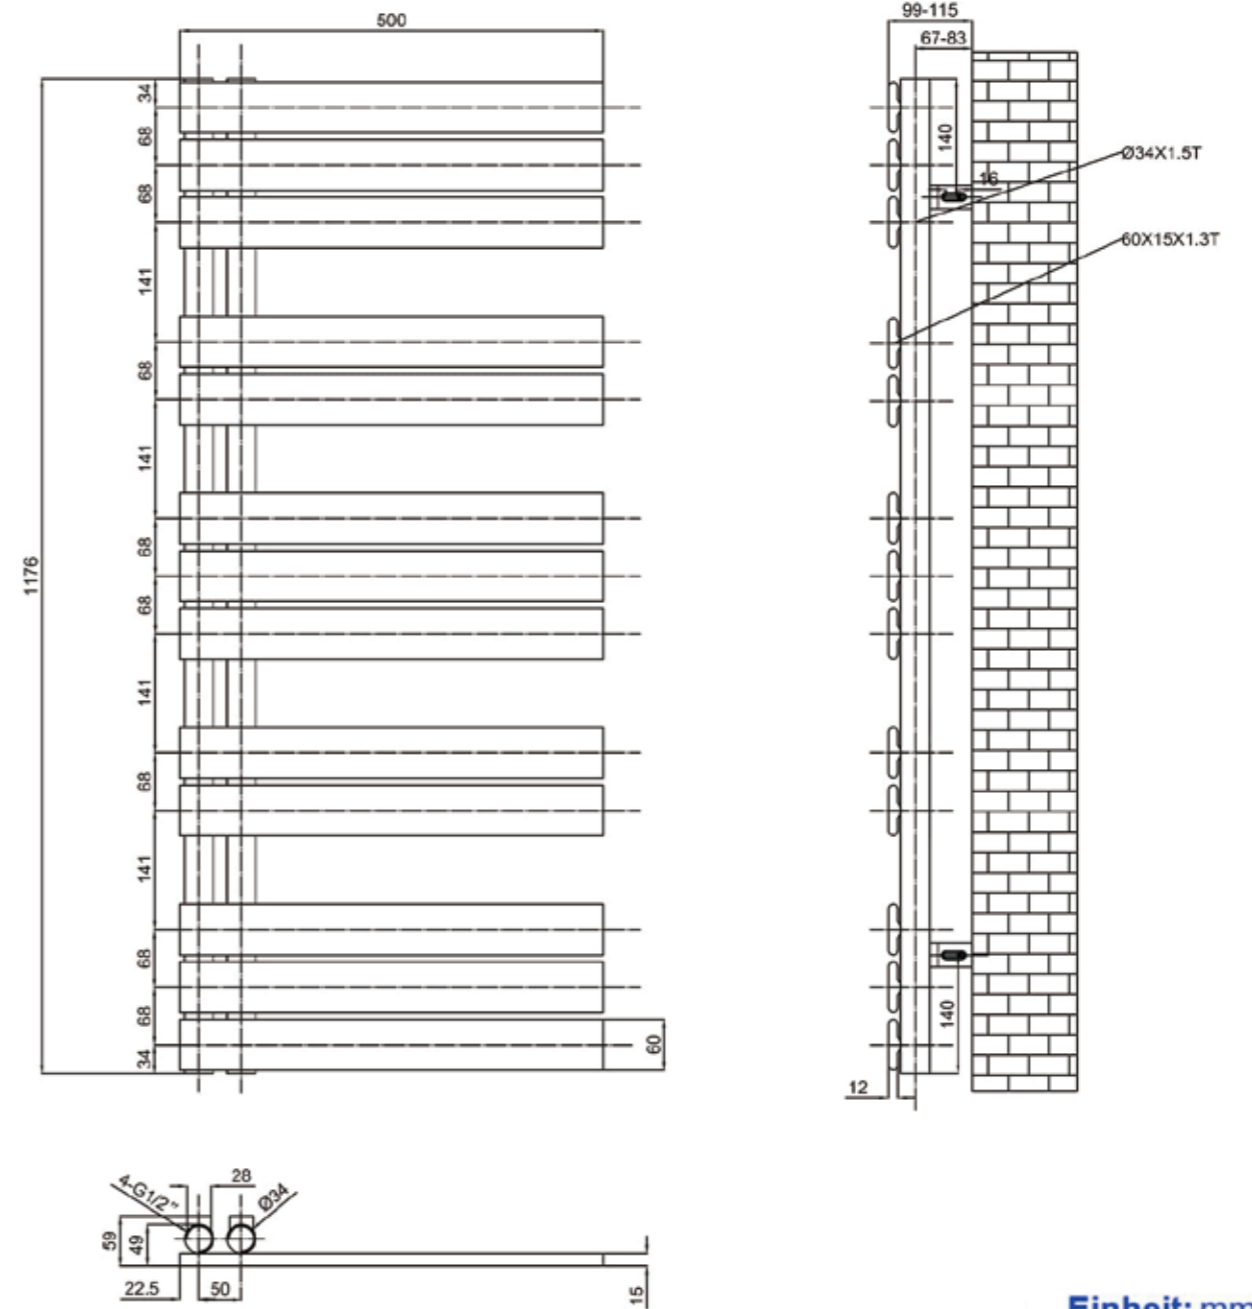


Einheit: mm

TECHNICAL SPECIFICATION

Size (H*W mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1150*500mm	50	15	2347	14.8	anthracite white black
1394*500mm	50	18	2820	17.7	
1638*500mm	50	21	3295	20.5	
1150*600mm	50	15	2697	17	
1394*600mm	50	18	3240	20.3	
1638*600mm	50	21	3751	13.6	

SL-WF11

Designed for modern bathrooms, its smooth circular design combines style with practicality.

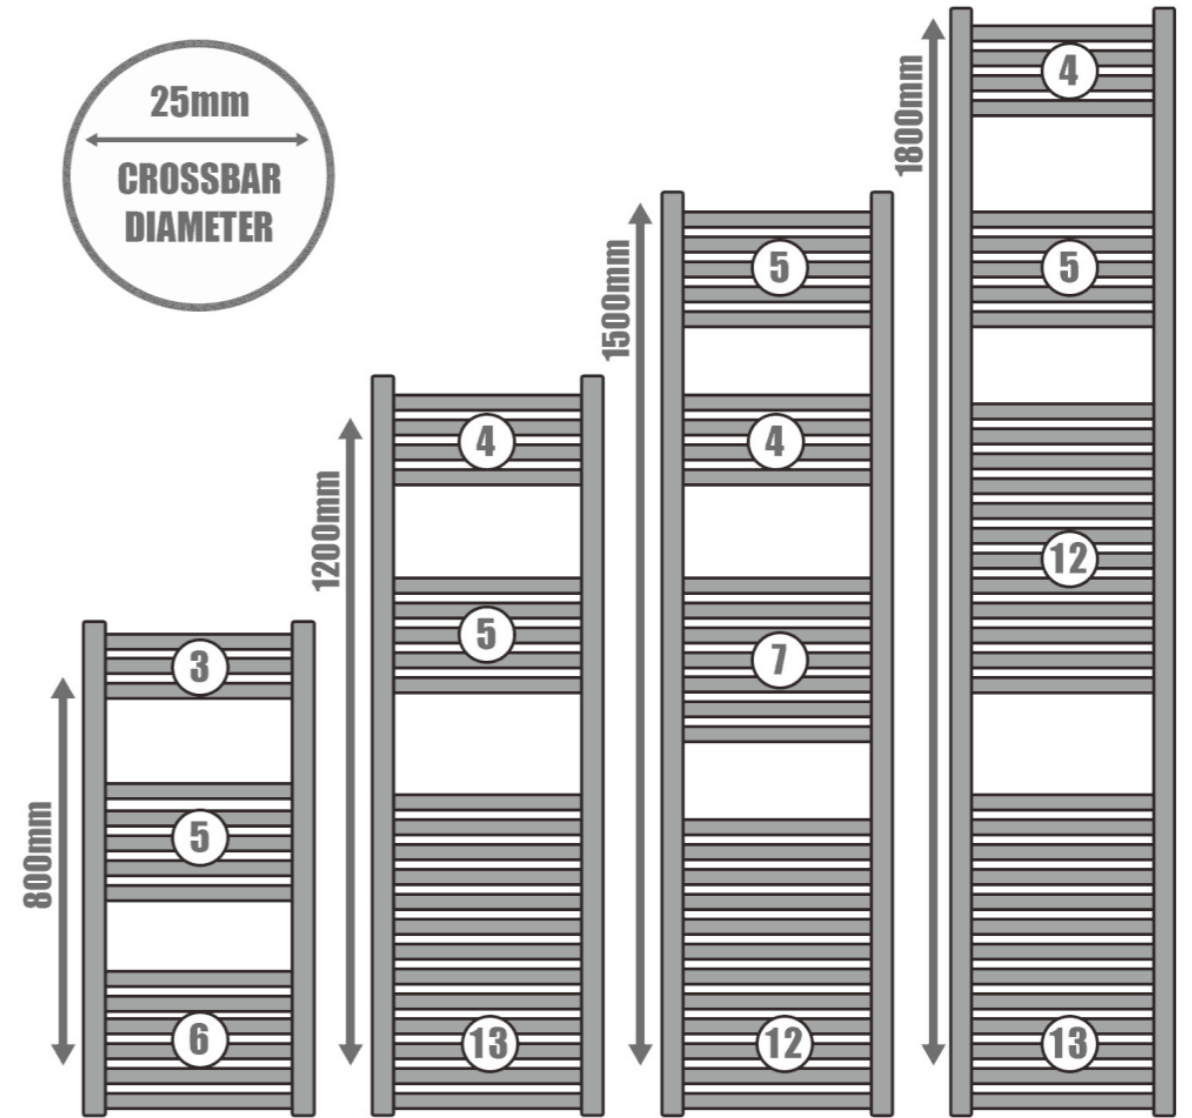


TECHNICAL SPECIFICATION

Size (H*W mm)	Center Distance (mm)	Bars	BTU	Finish
800*500mm	455	14	1811	anthracite white black
1200*500mm	455	22	2859	
1500*500mm	455	28	3536	
1800*500mm	455	34	4179	

SL-DP12

This classic tubular radiator offers reliable and even heat distribution, making it a trusted choice for any home. Its robust construction ensures long-lasting performance and easy maintenance.

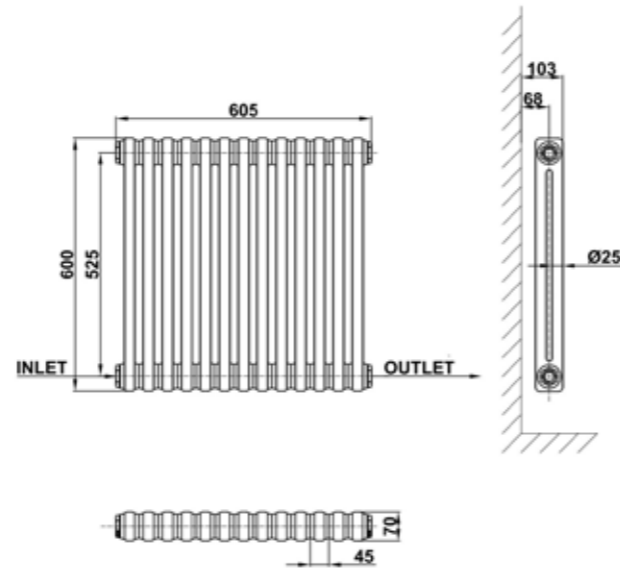

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
300	425	225	9	957	6.6	anthracite white black
300	605	225	13	1369	9.5	
300	830	225	18	1895	12	
300	1010	225	22	2304	14.6	
300	1190	225	26	2723	17.3	
300	1460	225	32	3352	21.2	
600	425	525	9	1889	11.3	
600	605	525	13	2728	15.6	
600	830	525	18	3760	21.3	
600	1010	525	22	4600	26.5	
600	1190	525	26	5425	29.3	
600	1460	525	32	6678	36.5	




TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1500	425	1425	4	2090	11.8	anthracite white black
1500	605	1425	6	3140	17	
1500	830	1425	8	4168	22.5	
1500	1010	1425	10	5222	27	
1500	1190	1425	12	6245	31.5	
1800	425	1725	4	2511	13.5	
1800	605	1725	6	3770	19.5	
1800	830	1725	8	5010	25.5	
1800	1010	1725	10	6260	31	
1800	1190	1725	12	7512	37.6	

SL-DP13

A traditional tubular radiator designed for efficient heating and durability. Timeless in style, it delivers consistent warmth throughout your space. Its sturdy construction and classic design make it a reliable choice for any home, combining functionality with enduring

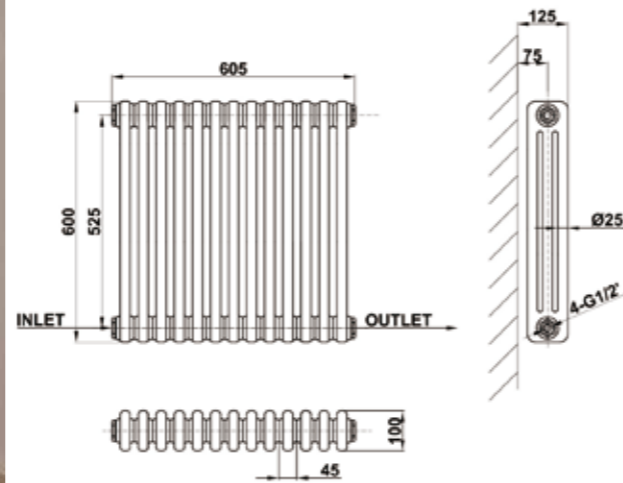

TECHNICAL SPECIFICATION


Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
300	425	225	9	1320	9.9	anthracite white black
300	605	225	13	1900	13.3	
300	830	225	18	2615	18.4	
300	1010	225	22	3190	22.5	
300	1190	225	26	3762	25.7	
300	1460	225	32	4625	31	
600	425	525	9	2680	16.9	
600	605	525	13	3868	23.88	
600	830	525	18	5353	33.7	
600	1010	525	22	6548	43.3	
600	1190	525	26	7730	49	
600	1460	525	32	9500	59.5	

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1500	425	1425	4	2907	18.3	anthracite white black
1500	605	1425	6	4361	27.4	
1500	830	1425	8	5805	36.6	
1500	1010	1425	10	7238	45.5	
1500	1190	1425	12	8678	54.8	
1800	425	1725	4	3426	22.7	
1800	605	1725	6	5138	32.7	
1800	830	1725	8	6851	42.6	
1800	1010	1725	10	8564	52	
1800	1190	1725	12	10265	57.4	

SL-DP14

This 4-column tubular radiator combines classic design with efficient heat output. Its robust construction ensures long-lasting durability, while delivering even, reliable warmth throughout your space.

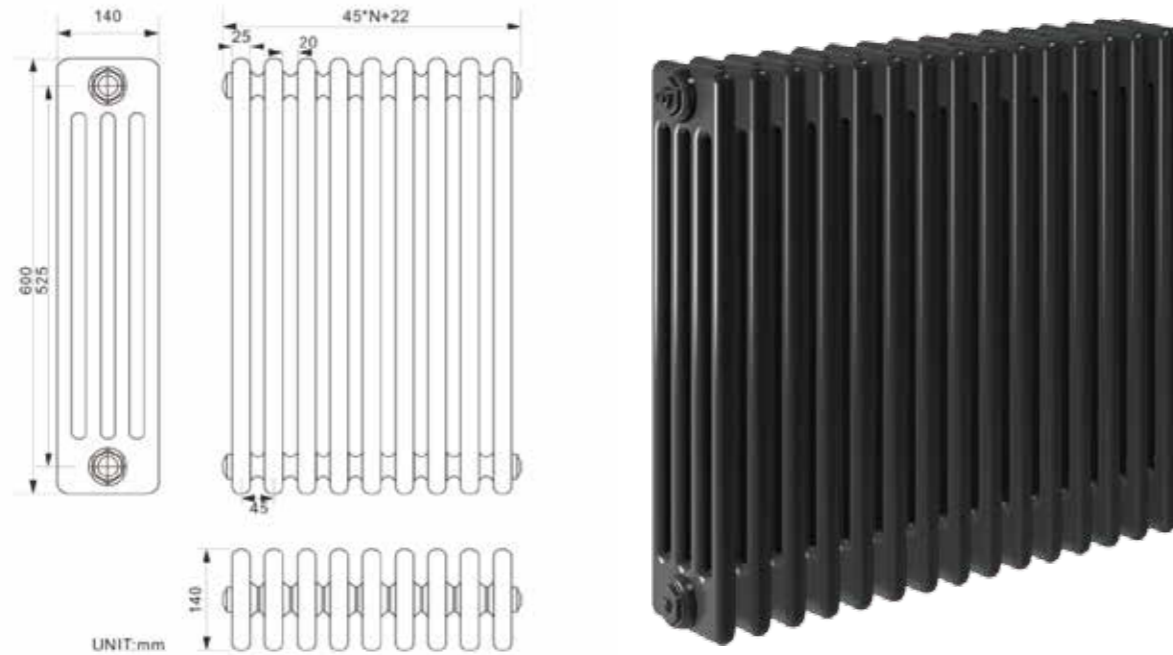

PRODUCT PARAMETERS :

Slice Width:25mm					Slice Thickness:140mm	
Height (mm)	Center Distance (mm)	Width (mm)	Thickness (mm)	Bar Qty. (psc)	EN422 (ΔT=50°)	
					Watts	BTU
600	525	337	140	7	801.92	2734.55
1500	1425	427	140	9	1878.96	6407.25
1800	1725	607	140	13	3237.87	11041.14



* The above color is for reference only, please consult customer service personnel for details of product color and other customized parameters.



SL-GB (10, 11, 21, 22, 33)


Our panel radiators are crafted on fully automated welding lines, ensuring precision and reliability. Featuring double-layer coating and an electrophoretic primer, they offer superior durability and a flawless finish.




TYPE 11-PC	HEIGHT (*)	500				TYPE 21-PCP	500				TYPE 22-PCCP	500				TYPE 33-PCCPCP	500			
		LENGTHS	° C	Watt	Kcal/h		BTU	WEIGHT kg	LENGTHS	° C		Watt	Kcal/h	BTU	WEIGHT kg		LENGTHS	° C	Watt	Kcal/h
300	75/65	234	201	798	5.72	300	353	304	1206	8.22	300	457	393	1560	9.47	300	653	562	2227	13.82
400	75/65	312	269	1065	7.03	400	471	406	1608	10.39	400	610	525	2080	11.93	400	870	749	2970	17.49
500	75/65	390	336	1331	8.34	500	589	507	2010	12.57	500	762	656	2600	14.38	500	1088	936	3712	21.16
600	75/65	468	403	1597	9.65	600	707	608	2412	14.75	600	914	787	3120	16.83	600	1306	1124	4455	24.83
700	75/65	546	470	1863	10.96	700	825	710	2814	16.92	700	1067	918	3640	19.28	700	1523	1311	5197	28.49
800	75/65	624	537	2129	12.28	800	942	811	3215	19.10	800	1219	1049	4160	21.73	800	1741	1498	5940	32.16
900	75/65	702	604	2395	13.59	900	1060	912	3617	21.27	900	1372	1180	4680	24.18	900	1958	1685	6682	35.83
1000	75/65	780	671	2661	14.90	1000	1178	1014	4019	23.45	1000	1524	1312	5200	26.63	1000	2176	1873	7425	39.50
1100	75/65	858	738	2927	16.21	1100	1296	1115	4421	25.63	1100	1676	1443	5720	29.08	1100	2394	2060	8167	43.17
1200	75/65	936	806	3194	17.53	1200	1414	1217	4823	27.80	1200	1829	1574	6240	31.53	1200	2611	2247	8909	46.84
1300	75/65	1014	873	3460	18.84	1300	1531	1318	5225	29.98	1300	1981	1705	6760	33.98	1300	2829	2434	9652	50.51
1400	75/65	1092	940	3726	20.15	1400	1649	1419	5627	32.15	1400	2134	1836	7280	36.44	1400	3046	2622	10394	54.17
1500	75/65	1170	1007	3992	21.77	1500	1767	1521	6029	34.71	1500	2286	1967	7800	39.36	1500	3264	2809	11137	58.39
1600	75/65	1248	1074	4258	23.08	1600	1885	1622	6431	36.89	1600	2438	2098	8320	41.81	1600	3482	2996	11879	62.06
1700	75/65	1326	1141	4524	24.39	1700	2003	1723	6833	39.07	1700	2591	2230	8840	44.26	1700	3699	3183	12622	65.72
1800	75/65	1404	1208	4790	25.70	1800	2120	1825	7235	41.24	1800	2743	2361	9360	46.71	1800	3917	3371	13364	69.39
1900	75/65	1482	1275	5057	27.01	1900	2238	1926	7637	43.42	1900	2896	2492	9880	49.17	1900	4134	3558	14107	73.06
2000	75/65	1560	1343	5323	28.33	2000	2356	2028	8039	45.59	2000	3048	2623	10400	51.62	2000	4352	3745	14849	76.73
2100	75/65	1638	1410	5589	29.64	2100	2474	2129	8441	47.77	2100	3200	2754	10920	54.07	2100	4570	3933	15591	80.40
2200	75/65	1716	1477	5855	30.95	2200	2592	2230	8843	49.95	2200	3353	2885	11440	56.52	2200	4787	4120	16334	84.07
2300	75/65	1794	1544	6121	32.26	2300	2709	2332	9244	52.12	2300	3505	3017	11960	58.97	2300	5005	4307	17076	87.74
2400	75/65	1872	1611	6387	33.57	2400	2827	2433	9646	54.30	2400	3658	3148	12480	61.42	2400	5222	4494	17819	91.40
2500	75/65	1950	1678	6653	34.89	2500	2945	2534	10048	56.47	2500	3810	3279	13000	63.87	2500	5440	4682	18561	95.07
2600	75/65	2028	1745	6920	36.20	2600	3063	2636	10450	58.65	2600	3962	3410	13520	66.32	2600	5658	4869	19304	98.74
2700	75/65	2106	1812	7186	37.51	2700	3181	2737	10852	60.83	2700	4115	3541	14040	68.77	2700	5875	5056	20046	102.41
2800	75/65	2184	1880	7452	38.82	2800	3298	2839	11254	63.00	2800	4267	3672	14560	71.22	2800	6093	5243	20789	106.10
2900	75/65	2262	1947	7718	40.14	2900	3416	2940	11656	65.18	2900	4420	3803	15080	73.68	2900	6310	5431	21531	109.70
3000	75/65	2340	2014	7984	41.45	3000	3534	3041	12058	67.35	3000	4572	3935	15600	76.13	3000	6528	5618	22274	113.40

TYPE 11-PC	HEIGHT (*)	600				TYPE 21-PCP	600				TYPE 22-PCCP	600				TYPE 33-PCCPCP	600			
		LENGTHS	° C	Watt	Kcal/h		BTU	WEIGHT kg	LENGTHS	° C		Watt	Kcal/h	BTU	WEIGHT kg		LENGTHS	° C	Watt	Kcal/h
300	75/65	272	234	929	6.76	300	406	349	1385	9.75	300	526	453	1795	11.24	300	754	649	2573	16.33
400	75/65	363	313	1239	8.34	400	541	466	1847	12.37	400	702	604	2394	14.20	400	1006	865	3431	20.74
500	75/65	454	391	1549	9.92	500	677	582	2308	14.98	500	877	755	2992	17.15	500	1257	1082	4289	25.16
600	75/65	545	469	1859	11.50	600	812	699	2770	17.59	600	1052	906	3591	20.10	600	1508	1298	5147	29.58
700	75/65	636	547	2169	13.07	700	947	815	3232	20.20	700	1228	1057	4189	23.06	700	1760	1514	6004	33.99
800	75/65	726	625	2478	14.65	800	1082	931	3693	22.82	800	1403	1208	4788	26.01	800	2011	1731	6862	38.41
900	75/65	817	703	2788	16.23	900	1218	1048	4155	25.43	900	1579	1359	5386	28.97	900	2263	1947	7720	42.82
1000	75/65	908	781	3098	17.81	1000	1353	1164	4616	28.04	1000	1754	1509	5985	31.92	1000	2514	2164	8578	47.24
1100	75/65	999	860	3408	19.39	1100	1488	1281	5078	30.66	1100	1929	1660	6583	34.88	1100	2765	2380	9436	51.66
1200	75/65	1090	938	3718	20.96	1200	1624	1397	5540	33.27	1200	2105	1811	7182	37.83	1200	3017	2596	10293	56.07
1300	75/65	1180	1016	4028	22.54	1300	1759	1514	6001	35.88	1300	2280	1962	7780	40.79	1300	3268	2813	11151	60.49
1400	75/65	1271	1094	4337	24.12	1400	1894	1630	6463	38.50	1400	2456	2113	8379	43.74	1400	3520	3029	12009	64.90
1500	75/65	1362	1172	4647	26.07	1500	2030	1747	6925	41.56	1500	2631	2264	8977	47.23	1500	3771	3245	12867	69.96
1600	75/65	1453	1250	4957	27.64	1600	2165	1863	7386	44.17	1600	2806	2415	9575	50.19	1600	4022	3462	13724	74.38
1700	75/65	1544	1328	5267	29.22	1700	2300	1979	7848	46.78	1700	2982	2566	10174	53.14	1700	4274	3678	14582	78.79
1800	75/65	1634	1407	5577	30.80	1800	2435	2096	8310	49.40	1800	3157	2717	10772	56.10	1800	4525	3894	15440	83.21
1900	75/65	1725	1485	5886	32.38	1900	2571	2212	8771	52.01	1900	3333	2868	11371	59.05	1900	4777	4111	16298	87.62
2000	75/65	1816	1563	6196	33.96	2000	2706	2329	9233	54.62	2000	3508	3019	11969	62.01	2000	5028	4327	17156	92.04
2100	75/65	1907	1641	6506	35.53	2100	2841	2445	9695	57.24	2100	3683	3170	12568	64.96	2100	5279	4543	18013	96.46
2200	75/65	1998	1719	6816	37.11	2200	2977	2562	10156	59.85	2200	3859	3321	13166	67.92	2200	5531	4760	18871	100.87
2300	75/65	2088	1797	7126	38.69	2300	3112	2678	10618	62.46	2300	4034	3472	13765	70.87	2300	5782	4976	19729	105.30
2400	75/65	2179	1875	7435	40.27	2400	3247	2794	11079	65.08	2400	4210	3623	14363	73.83	2400	6034	5192	20587	109.70
2500	75/65	2270	1954	7745	41.85	2500	3383	2911	11541	67.69	2500	4385	3774	14962	76.78	2500	6285	5409	21444	114.10
2600	75/65	2361	2032	8055	43.42	2600	3518	3027	12003	70.30	2600	4560	3925	15560	79.73	2600	6536	5625	22302	118.50
2700	75/65	2452	2110	8365	45.00	2700	3653	3144	12464	72.91	2700	4736	4076	16159	82.69	2700	6788	5841	23160	123.00
2800	75/65	2542	2188	8675	46.58	2800	3788	3260	12926	75.53	2800	4911	4227	16757	85.64	2800	7039	6058	24018	127.40
2900	75/65	2633	2266	8984	48.16	2900	3924	3377	13388	78.14	2900	5087	4377	17355	88.60	2900	7291	6274	24876	131.80
3000	75/65	2724	2344	9294	49.74	3000	4059	3493	13849	80.75	3000	5262	4528	17954	91.55	3000	7542	6491	25733	136.20


Plan view on Type 10 Radiator

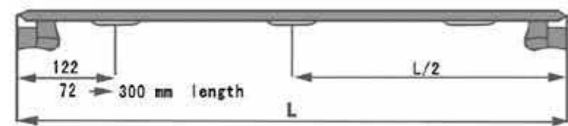

Plan view on Type 11 Radiator

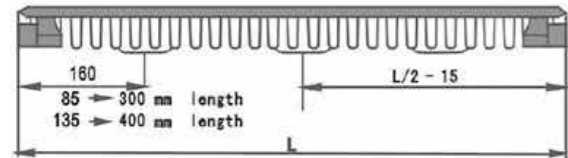

Plan view on Type 21 Radiator

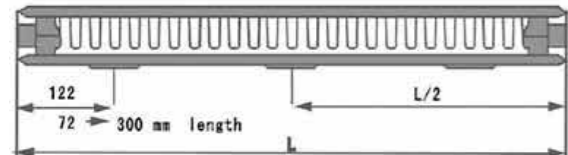

SL-6030

Designed to impress, these designer radiators bring both style and comfort to any space. Elegant, modern, and functional, they elevate the interior while providing reliable heat



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Depth	Bars	MPa
600	410	100	8	1.0
600	510	100	10	1.0
600	610	100	12	1.0
600	710	100	14	1.0
600	810	100	16	1.0
600	910	100	18	1.0
600	1010	100	20	1.0

Rectangle Tube :60*30mm Square Tube : 40*40mm

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Depth	Bars	MPa
1600	310	100	6	1.0
1600	410	100	8	1.0
1600	510	100	10	1.0
1800	310	100	6	1.0
1800	410	100	8	1.0
1800	510	100	10	1.0

Rectangle Tube :60*30mm Square Tube: 40*40mm

SL-3030

Crafted with precision using 30×30mm water pipes, this radiator ensures optimal flow and consistent warmth. Its durable construction and elegant design make it a perfect choice for both classic and modern interiors.



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
300	425	225	9	1320	9.9	anthracite white black
300	605	225	13	1900	13.3	
300	830	225	18	2615	18.4	
300	1010	225	22	3190	22.5	
300	1190	225	26	3762	25.7	
300	1460	225	32	4625	31	
600	425	525	9	2680	16.9	
600	605	525	13	3868	23.88	
600	830	525	18	5353	33.7	
600	1010	525	22	6548	43.3	
600	1190	525	26	7730	49	
600	1460	525	32	9500	59.5	


TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Depth	Bars	MPa	BTU	Finish
1600	360	95	4*2	1.0	7769	anthracite white black
1600	540	95	6*2	1.0	11654	
1800	360	95	4*2	1.0	8741	
1800	540	95	6*2	1.0	13111	

Square Tube :30*30mm Round Tube : 35mm Gap: 15mm

SL-SJ26

Crafted with distinctive folded triangular tubes, this designer radiator combines architectural aesthetics with efficient heating performance, bringing both comfort and style into modern interiors.

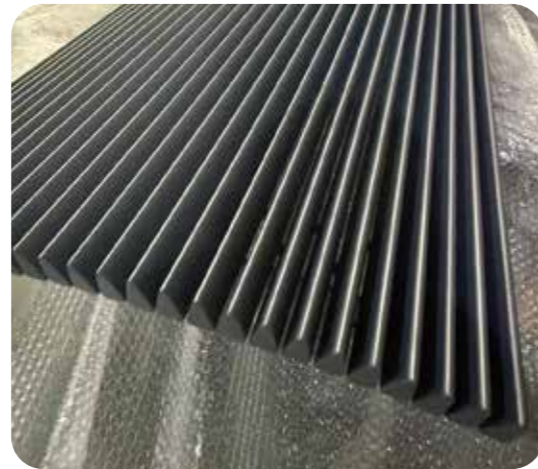

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
300	425	225	9	1320	9.9	anthracite white black
300	605	225	13	1900	13.3	
300	830	225	18	2615	18.4	
300	1010	225	22	3190	22.5	
300	1190	225	26	3762	25.7	
300	1460	225	32	4625	31	
600	425	525	9	2680	16.9	
600	605	525	13	3868	23.88	
600	830	525	18	5353	33.7	
600	1010	525	22	6548	43.3	
600	1190	525	26	7730	49	
600	1460	525	32	9500	59.5	



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Center Distance (mm)	Bars	BTU	Weight (kg)	Finish
1500	425	1425	4	2907	18.3	anthracite white black
1500	605	1425	6	4361	27.4	
1500	830	1425	8	5805	36.6	
1500	1010	1425	10	7238	45.5	
1500	1190	1425	12	8678	54.8	
1800	1460	1725	4	3426	22.7	
1800	425	1725	6	5138	32.7	
1800	605	1725	8	6851	42.6	
1800	830	1725	10	8564	52	
1800	1010	1725	12	10265	57.4	

SL-M5025

Mirror radiator combines efficient heating with a functional mirror design, saving space while enhancing modern interior style, making it ideal for bedrooms, hallways, and dressing areas in contemporary homes.



TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Depth	Bars	MPa	BTU	Finish
1600	381	59	4	1.0	1910	anthracite white black
1600	499	59	6	1.0	2864	
1800	381	59	8	1.0	2169	
1800	499	59	10	1.0	3253	

Elliptical Tube :50*25mm Round Tube: 35mm

TECHNICAL SPECIFICATION

Height (mm)	Width (mm)	Depth	Bars	MPa	BTU	Finish
1600	381	84	4*2	1.0	3751	anthracite white black
1600	499	84	6*2	1.0	5627	
1800	381	84	4*2	1.0	4338	
1800	499	84	6*2	1.0	6506	

Elliptical Tube :50*25mm Round Tube: 35mm

RADIATOR VALVE



SL60660

SL60663

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2"X φ 16



SL60660A

SL60668

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2"× φ 16



Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2"X φ 16



SL60200D

SL60201D

SL57656

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 3/4"X φ 16 3/4"X φ 20

H VALVE

SL60228

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤ 100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



SL60635B

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤ 100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



SL60229

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤ 100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



SL60636B

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤ 100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



H VALVE



SL80AHH

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications	1/2"	3/4"
----------------	------	------



SL80BHH

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications	1/2"	3/4"
----------------	------	------



SL80CHH

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications	1/2"	3/4"
----------------	------	------



SL80WHH

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications	1/2"	3/4"
----------------	------	------

H VALVE



SL9015K

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



SL9016K

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



SL9017K

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"



SL9018K

Material: brass hpb57-3
 Nominal pressure: ≤ 10bar
 Applicable medium: cold and hot water
 Working temperature: ≤100°C
 Connection thread: ISO 228 standard

Specifications 1/2" 3/4"